

Linear Motor Realizing High Speed and High Precision Feed

# FANUC

## LINEAR MOTOR *Li*S-B series




# Linear Motor Realizing High Speed and High Precision Feed

## FANUC LINEAR MOTOR L<sup>i</sup>S-B series

### Features

FANUC LINEAR MOTOR L<sup>i</sup>S-B series, without deforming elements such as ball screw, or without wearing parts in mechanical structure, realizes high gain due to high rigidity of servo system, higher precision and maintenance free in mechanism. Additionally, rigid long stroke axis and increase of thrust force and multi-head configuration by arranging multiple coil sliders on single magnet track are easily available.

### Wide Line-up

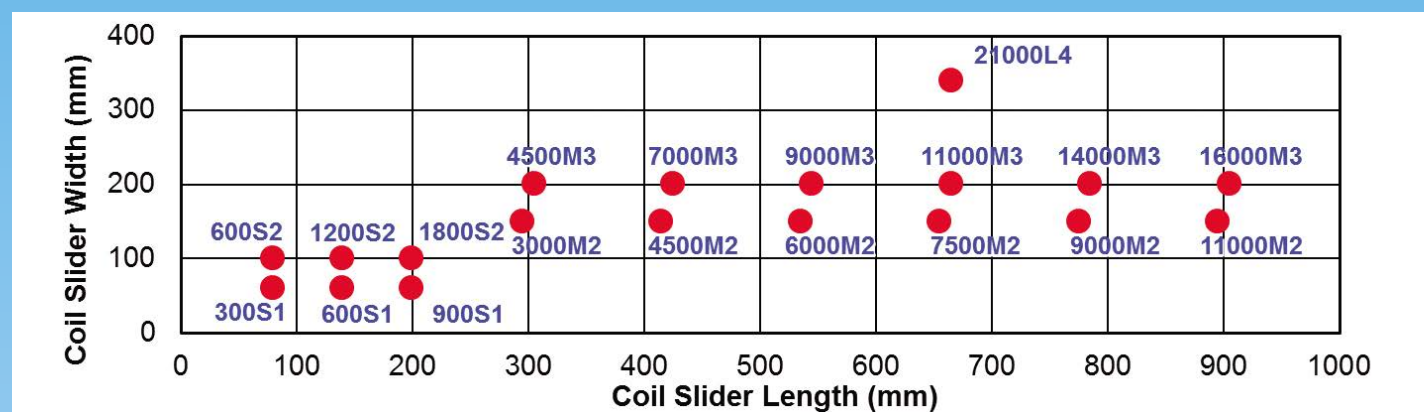

FANUC LINEAR MOTOR L<sup>i</sup>S-B series has a wide range of line-up with 19 models from 300N to 21000N max. force. 400V drive is available for all models.

### High Speed and High Acceleration

Realizing maximum speed of 4m/s and maximum acceleration of over 30G, which is difficult to be realized by using rotary motor.

### High Accuracy

Cooling tube embedded near to coil winding of heat source carries out heat efficiently. This cooling structure minimizes effect of heat transmission from motor to machine, which results in higher accuracy of machine. L<sup>i</sup>S-B series has realized further reduction of heat generation.


Additionally, original position detection circuit by treating signal from linear encoder, realizes detection system of 0.001  $\mu$ m resolution up to 4m/s speed. And latest digital servo control technology such as SERVO HRV<sup>+</sup> Control, enables smooth and high accuracy feed up to high speed.

### Conforms to EMC Directive

FANUC LINEAR MOTOR L<sup>i</sup>S-B series conforms to EMC directive, so CE mark of the system will be easily acquired.

## System Configuration


### FANUC's products

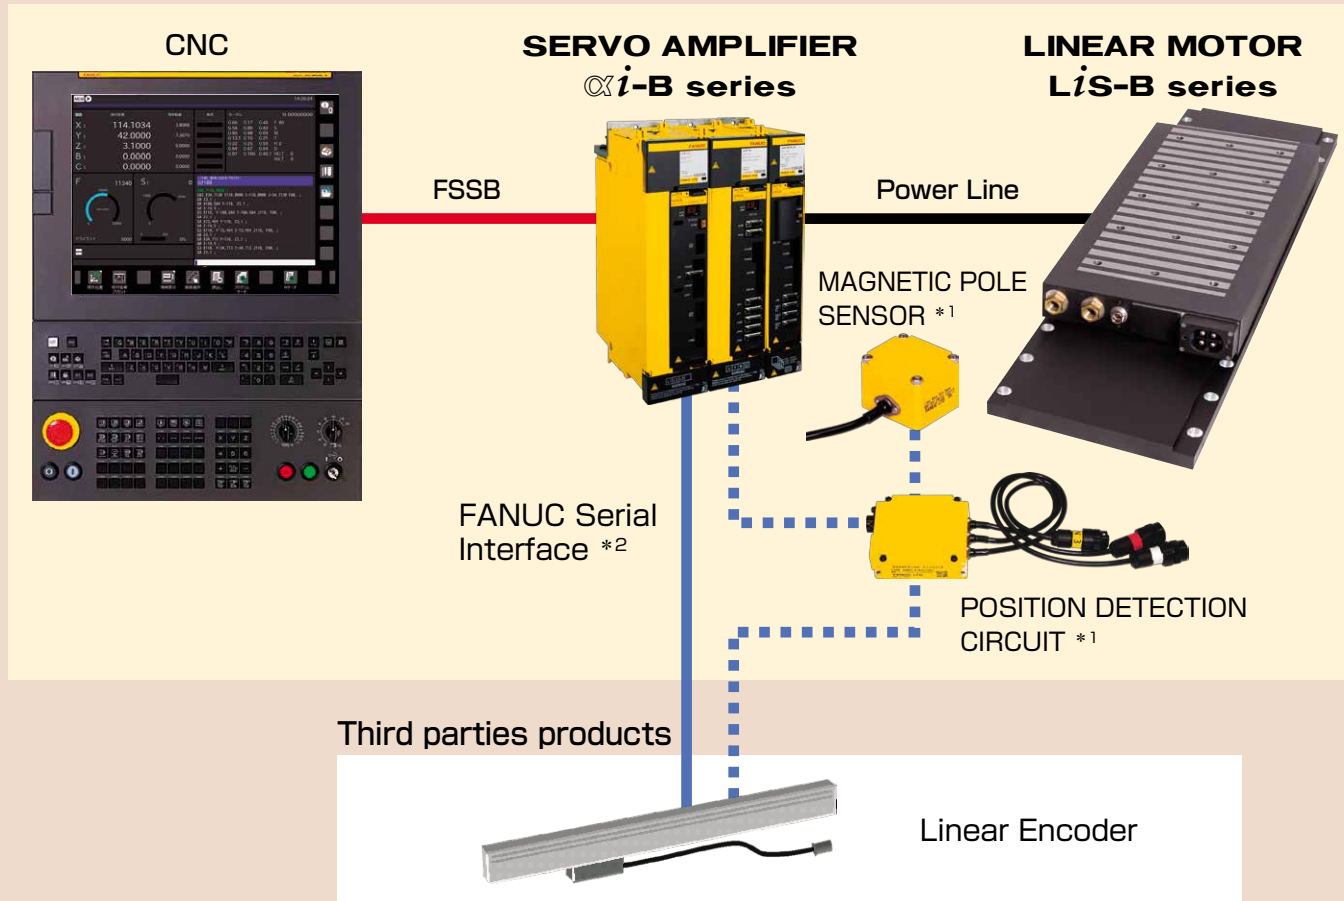


\*1 Not necessary for absolute type linear encoder  
 \*2 Necessary to conform to FANUC Serial Interface

## Sample data\*

### High accuracy even at high speed

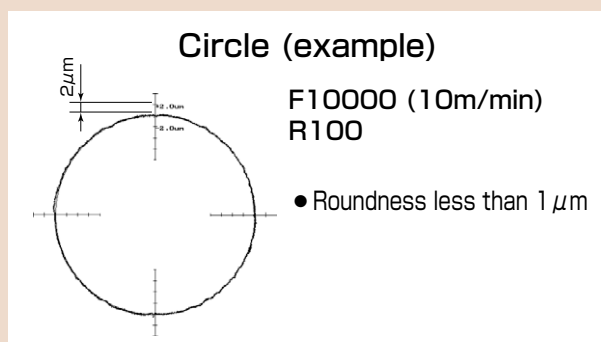

### Smooth feed

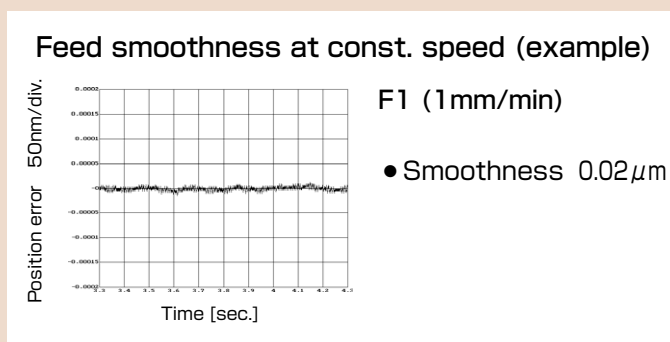


\*Feedback data from linear encoder

# Maintenance and Customer Support

## Worldwide Customer Service and Support

FANUC operates customer service and support network worldwide through subsidiaries and affiliates. FANUC provides the highest quality service with the prompt response at any location nearest you.

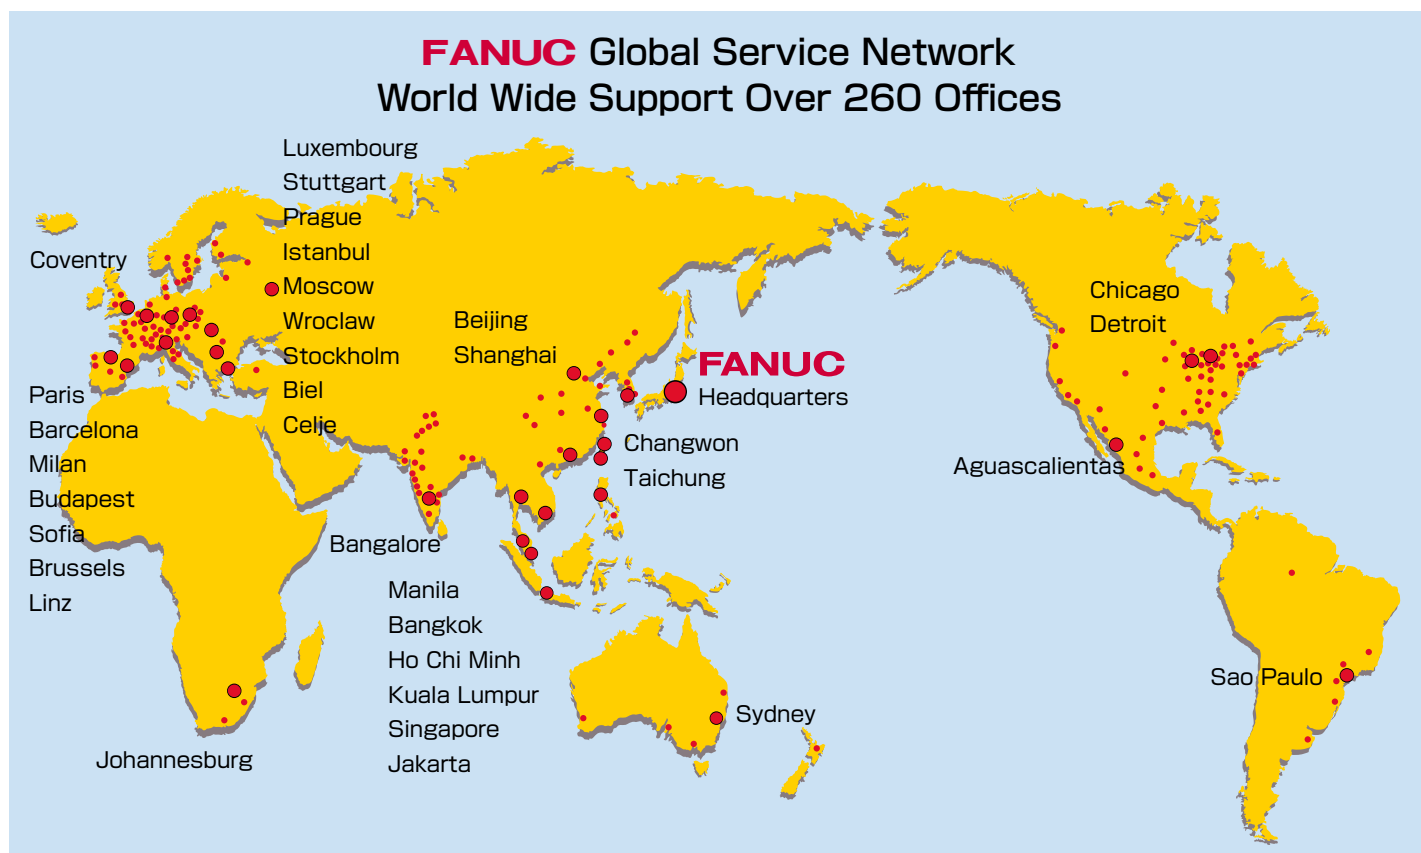

## FANUC ACADEMY

FANUC ACADEMY operates versatile training courses to develop skilled engineers effectively in several days.

Inquiries : Oshino-mura, Yamanashi,  
Japan 401-0597

Phone : 81-555-84-6030

Fax : 81-555-84-5540



## FANUC CORPORATION

•Headquarters Oshino-mura, Yamanashi 401-0597, Japan  
Phone: (+81)555-84-5555 <https://www.fanuc.co.jp/>

### •Overseas Affiliated Companies

FANUC America Corporation

Phone: (+1)248-377-7000

<https://www.fanucamerica.com/>

FANUC Europe Corporation, S.A.

Phone: (+352)727777-1

<https://www.fanuc.eu/>

BEIJING-FANUC Mechatronics CO., LTD

Phone: (+86)10-6298-4726

<http://www.bj-fanuc.com.cn/>

KOREA FANUC CORPORATION

Phone: (+82)55-278-1200

<https://www.fkc.co.kr/>

TAIWAN FANUC CORPORATION

Phone: (+886)4-2359-0522

<https://www.fanuctaiwan.com.tw/>

FANUC INDIA PRIVATE LIMITED

Phone: (+91)80-2852-0057

<https://www.fanucindia.com/>

• All specifications are subject to change without notice.  
• No part of this catalog may be reproduced in any form.  
• The products in this catalog are controlled based on Japan's " Foreign Exchange and Foreign Trade Law". The export from Japan may be subject to an export license by the government of Japan. Further, re-export to another country may be subject to the license of the government of the country from where the product is re-exported. Furthermore, the product may also be controlled by re-export regulations of the United States government. Should you wish to export or re-export these products, please contact FANUC for advice.

© FANUC CORPORATION, 2008

LinearLiS(E)-15a, 2021.9, Printed in Japan